

### UC232C

USB-C to RS-232 Adapter (45 cm)



## USB-C to Serial Adapter

USB-C to RS-232 Adapter 45cm UC232C

- USB-C
- RS-232
- Anti-EMI



Compatible with  
**Windows 10, 8, 7 / macOS / Linux**

**Multi-System Support**

The UC232C is compatible with multiple operating systems, such as macOS, Linux, and Windows 7/8/10.

**Stable Performance, Fast Transmission**


The UC232C offers USB 2.0 connectivity and is equipped with a robust cable that ensures proven anti-EMI performance for reliable signal transmission at speeds of up to 921.6 Kbps baud rate.



### USB-C



Laptop



PC


### RS-232



Modem



Printer



Network Switch



Scanner



PLC Controller



POS





**Broadly Compatible with Serial Devices**

The UC232C allows your PC or laptop to control and communicate with various RS232 serial devices such as modem, network switch, PLC controller, printer, scanner, POS and so on.

**Applications**

- 1.
- 2.
- 3.
- 4.



Barcode Scanning



POS Terminal



PLC Programming



Medical / Scientific Instrument

[Previous](#) [Next](#)

**Product Comparison**

The UC232 lineup is well-suited for a variety of applications including industrial automation, IT networking, and control systems.

\*Notes: Models equipped with FTDI chip provide better signal transmission with legacy Windows OS.

**Talk to Our Experts**

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name \*

Last Name \*

- Country \*


Company \*

Email \*

Phone Number \*

- Customer Type \*

Job Title \*

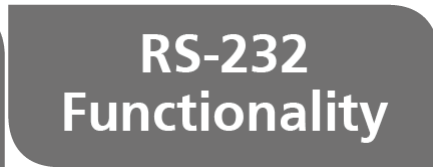

**Features**


The UC232C is a USB-C to RS-232 adapter that enables legacy serial device connectivity for laptops / PCs without a COM / DB-9 serial port. Supporting both Windows and Mac platforms with data transfer rates up to 921.6 Kbps for rapid performance, it serves as a convenient connectivity solution for industrial automation systems, scientific instrument, point of sale systems, and any specialized industrial and consumer applications.

- Supports RS-232 serial interface
- Excellent anti-electromagnetic interference (anti-EMI) capability for stable transmission performance
- Full compliance with USB specifications
- Supports up to 921.6 Kbps data transfer rates
- OS Compatibility: Windows, Mac, and Linux
- Works with legacy serial devices

Specifications

Connectors	
USB Port	1 x USB Type C Male
Serial	1 x DB-9 Male
Data Rate	Up to 921.6 Kbps
Cable Length	45cm
LEDs	Power (Orange)
Power Mode	Bus Powered
USB Specification	USB compliant
Environmental	
Operating Temperature	0-40°C
Storage Temperature	-20-60°C
Humidity	0-80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.04 kg ( 0.09 lb )
Dimensions (L x W x H)	6.59 x 3.40 x 1.60 cm (2.59 x 1.34 x 0.63 in.)
Power Consumption	DC5V:0.13W:1BTU/h  Note: <ul style="list-style-type: none"> <li>• The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>• The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

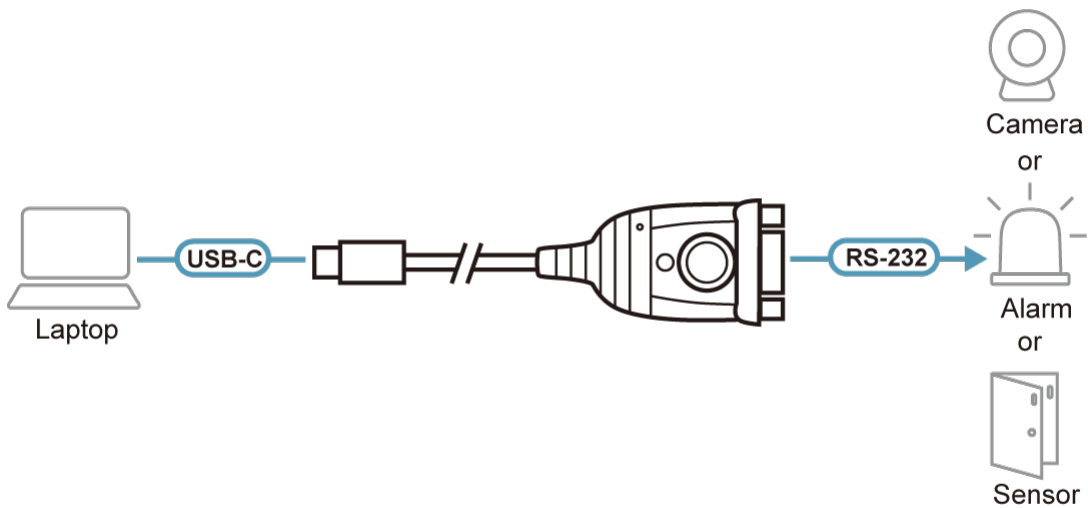



Simply Better Connections

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.