

## 2L-7D02H21

1.8 m Ultra High Speed HDMI™ Cable



# Ultra High Speed, Ultimate Clarity



## 1.8 m Ultra High Speed HDMI Cable

**8K** / **4K** / **HDMI** / **HDCP** / **3D Video** / **21:9** / **eARC** / **HDR**  
 8K@60 4K@120 48 Gbps 2.2 / 2.3 3D Video Aspect Ratio eARC Dynamic

Astounding 8K Clarity with Dynamic HDR Enhancement

Each video detail is enhanced on a scene-by-scene and frame-by-frame basis, optimizing brightness, contrast, and color for a more lifelike and engaging viewing experience.



**Immerse in a Lossless Audiovisual Adventure with eARC Enhancement**

Featuring eARC (Enhanced Audio Return Channel), this ultra-high-speed HDMI cable enables optimal synchronization between audio and video, delivering a more immersive audiovisual experience with richer sound in a simplified setup.







Simply Better Connections

#### Captivating Cinematic Audio-Visual Mastery

- Up to 32 channels for an ultimate surround sound experience
- 1536 kHz audio sample rate for realistic audio presentation
- Ultra-wide 21:9 aspect ratio for cinema-level video experience

#### Dive In. Game On.

Transform your gaming experience with reduced lag, minimal screen tearing, optimized response times, and smoother video transitions, all thanks to QMS, VRR, ALLM, and QFT.



#### Up to 48 Gbps Ultra High Speed Transmission

The ultra-high-speed HDMI cable transmits signals at speeds of up to 48 Gbps, providing crisp 8K visuals without any flashing or ghosting in the video.





Broad Compatibility

HDMI      HDMI

**ULTRA**  
Certified Cable

**HDMI™**  
**ULTRA**  
**HIGH SPEED**

BCDFG123456  
www.HDMI.org

### Display Device

8K

TV / HDTV

4K@120

Monitor

Projector

Video Wall


PC

Laptop

TV Box


Gaming

### Source Device

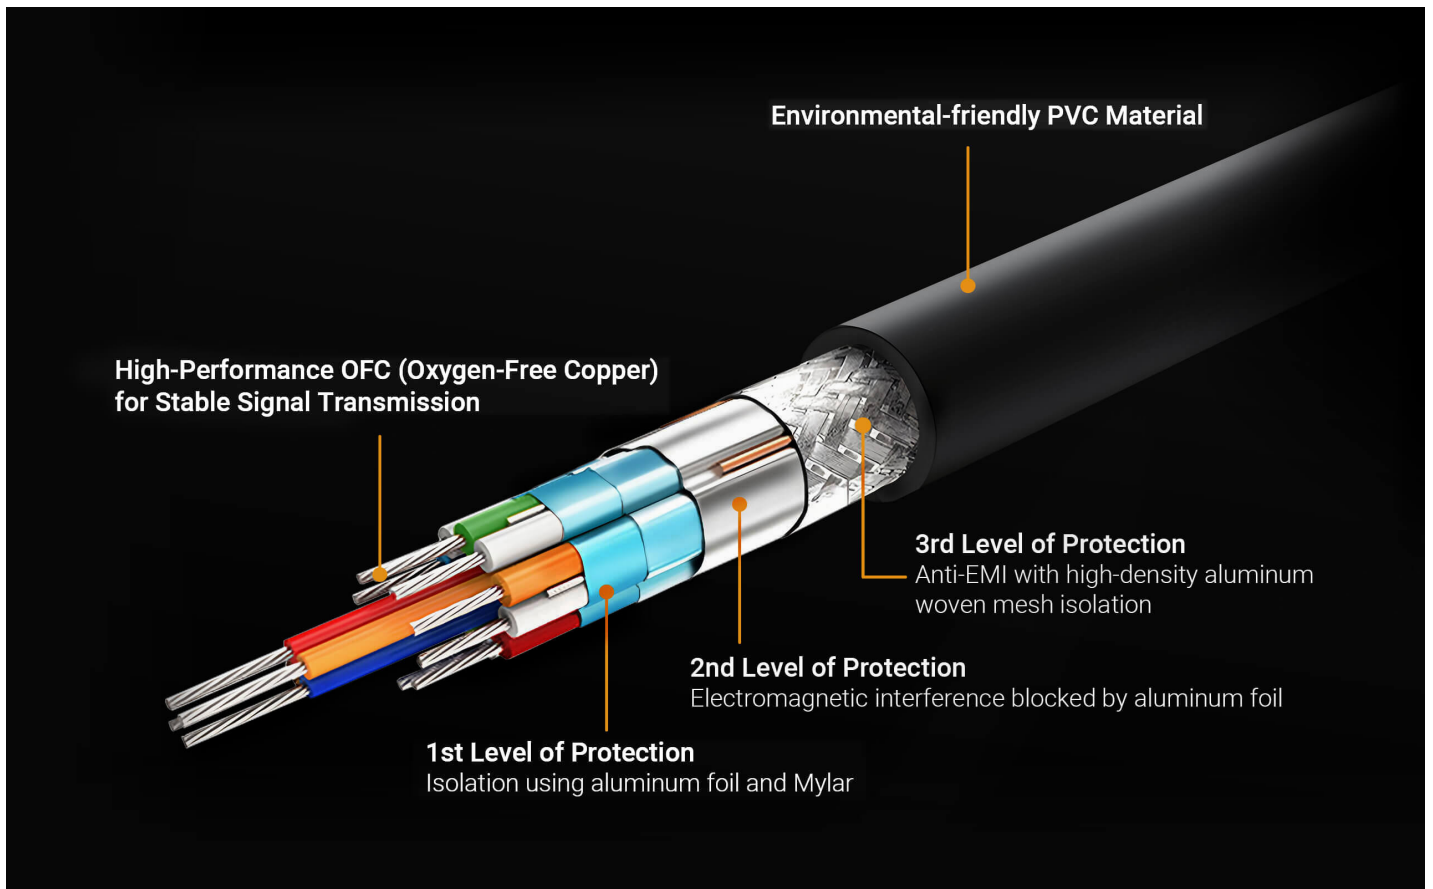



Applications

- 1.
- 2.
- 3.

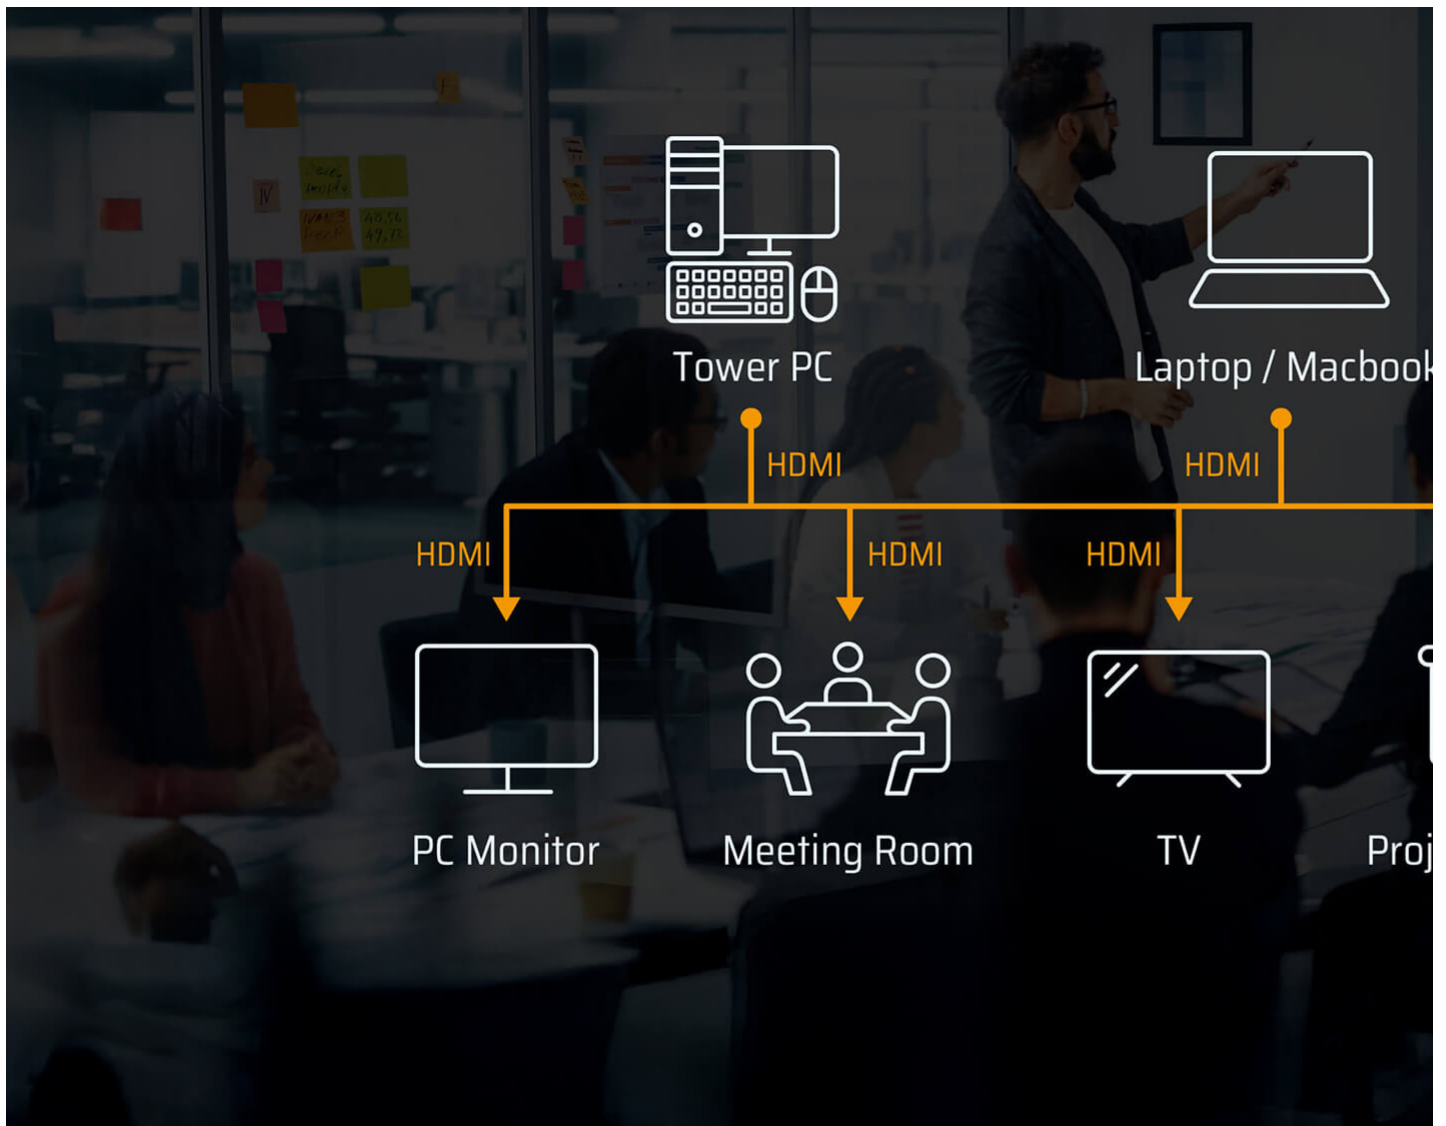



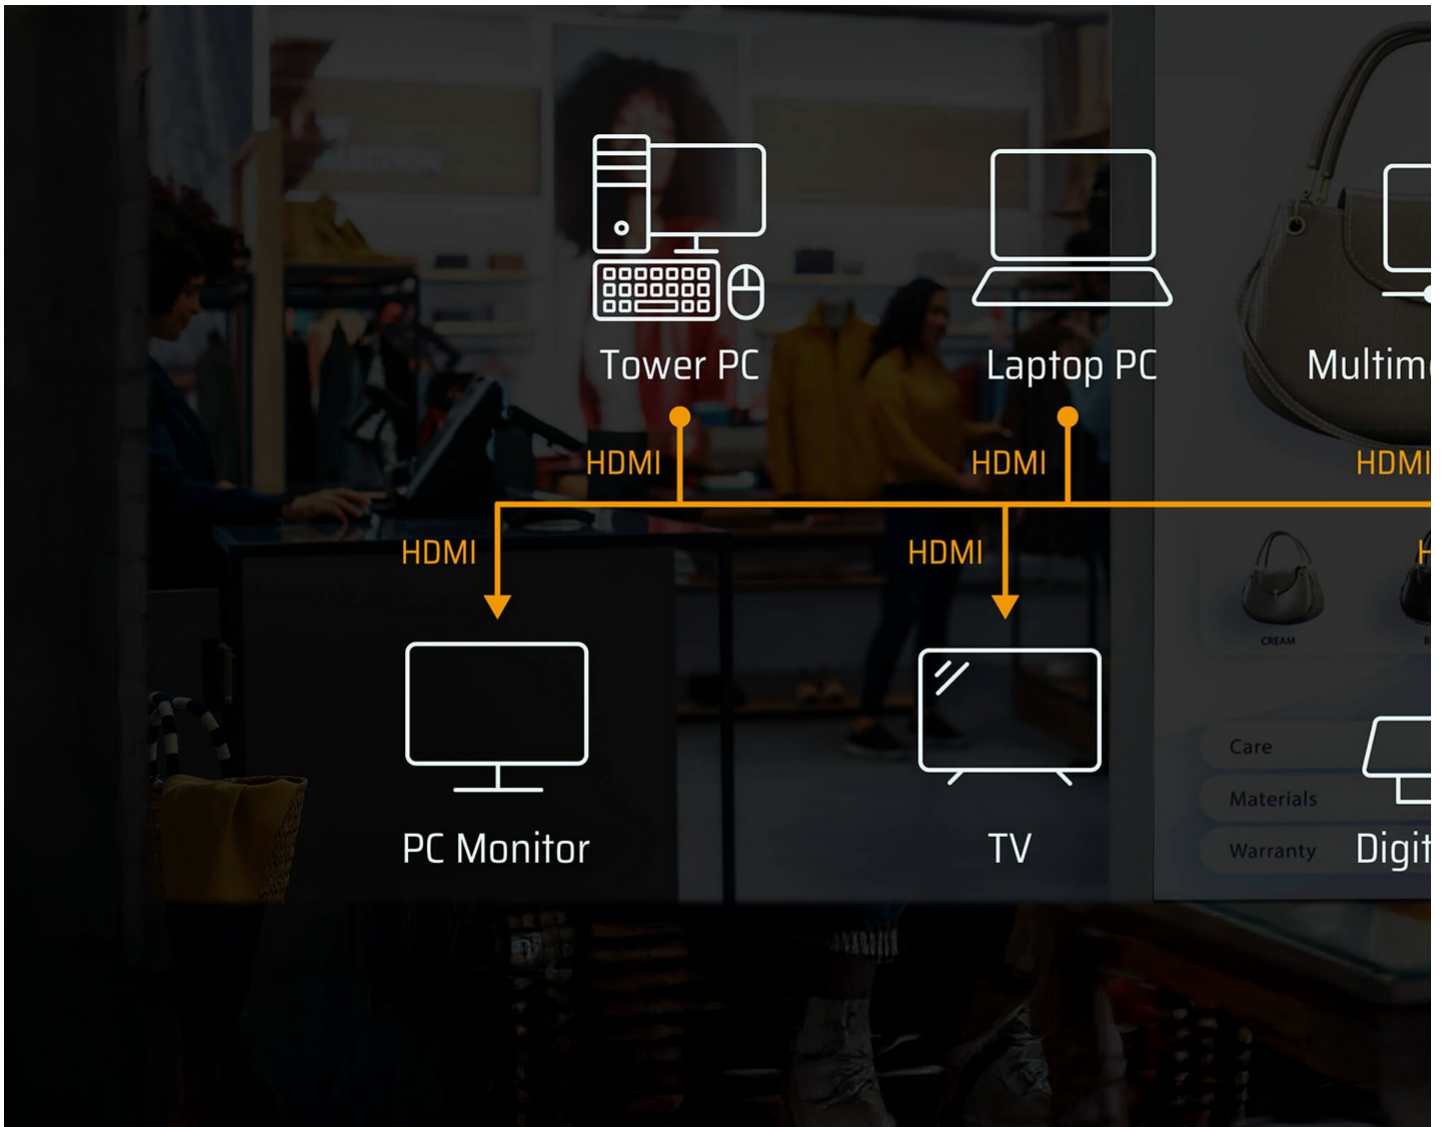

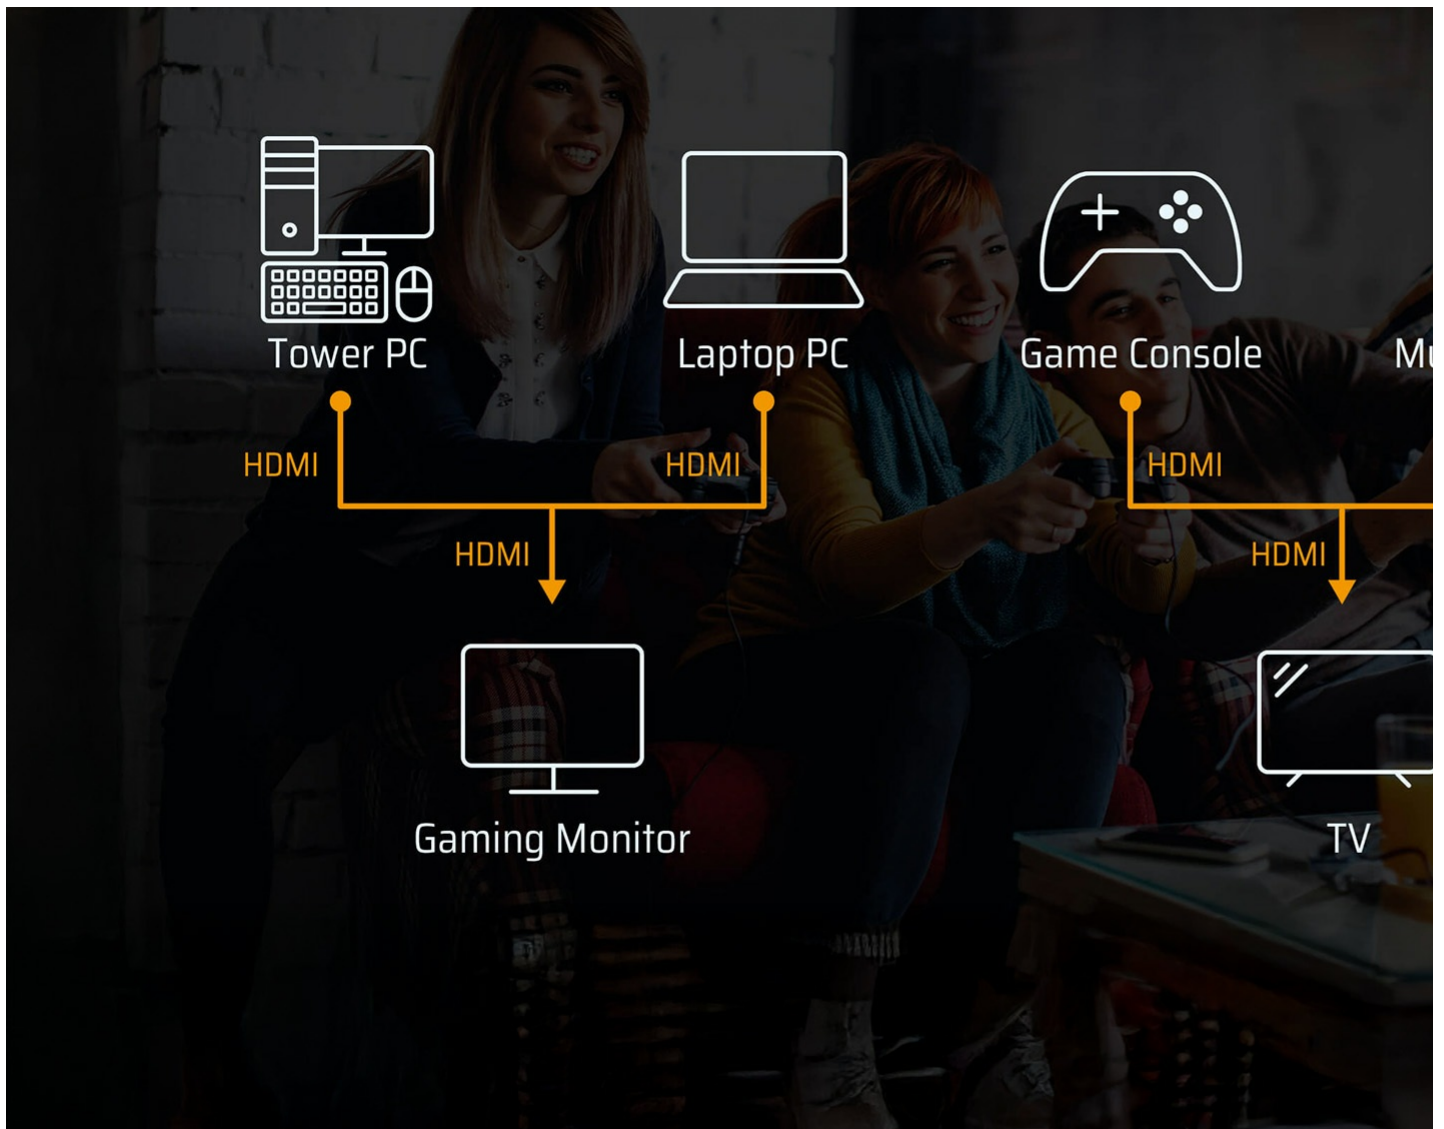

At Home

[Previous](#) [Next](#)

Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name \*

Last Name \*

- Country \*

Company \*

Email \*

Phone Number \*

- Customer Type \*

Job Title \*



#### Features

Meeting the latest HDMI specifications, the 2L-7D02H21 supports resolutions and refresh rates up to 8K @ 60 Hz and 4K @ 120 Hz to deliver an immersive cinematic video experience and smooth fast-action details. With up to 48 Gbps high transmission speed, this cable is capable of transmitting high bandwidth dependent content without compression while supporting Dynamic HDR for superior visuals. Meanwhile, it supports 3D, VRR, ALLM, Ethernet, eARC, 32 audio channels, and sampling rates up to 1536 KHz.

In terms of other highlights, its exceptionally low EMI (electro-magnetic interference) helps reduce interference with nearby wireless devices. Plus, the cable features premium tinned copper wire to ensure stable connection and optimal signal transmission. The 2L-7D02H21 works with the latest gaming consoles and existing HDMI compatible devices, future proofing the 8K HDMI content demand for years to come.


- Supports resolutions and refresh rates up to 8K @ 60 Hz and 4K @ 120 Hz
- Up to 48 Gbps high transmission speed allows for uncompressed, high bandwidth dependent content transmission
- Supports Dynamic HDR, 3D, VRR, ALLM, Ethernet, eARC, 32 audio channels, and up to 1536 KHz sampling rates
- Exceptionally low EMI reduces interference with nearby wireless devices
- Robust mechanical design with premium tinned copper wire
- Works with the latest gaming consoles and existing HDMI compatible devices

#### Specification

|                       |                           |
|-----------------------|---------------------------|
| Max. Video Resolution | 7680x4320@60Hz (4:4:4)    |
| Physical Properties   |                           |
| Cable Length          | 1.8M                      |
| Cable Color           | Black                     |
| Cable Outer Dimension | 6.3 ± 0.15mm              |
| Conductor Gauge       | 30AWG                     |
| Conductor Material    | Tinned Copper             |
| Connector Plating     | G/F                       |
| Connector Type        | HDMI (19pin) Male to Male |
| Cable Shield Type     | Aluminum Foil             |
| Cable Jacket Type     | PVC                       |
| Environmental         |                           |
| Operating Temperature | 80°C                      |
| Rating                | UL VW-1 (Flame rate)      |



Diagram

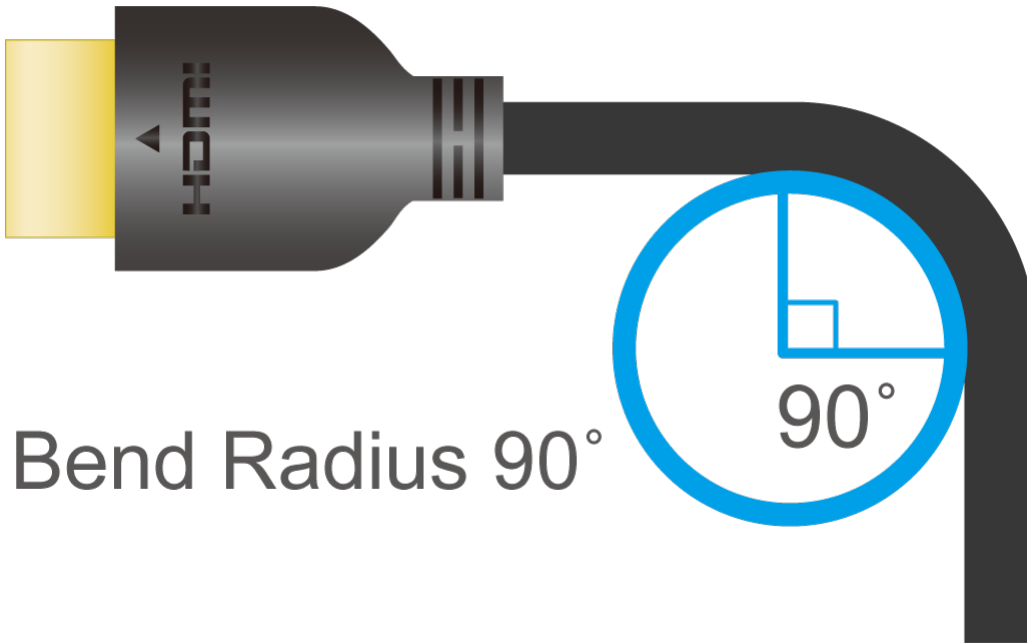

Bend Radius 90°

**ATEN International Co., Ltd.**

3F., No. 125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.