

VS0108H

8-Port HDMI Splitter



The VS0108H HDMI Splitter is the perfect solution for anyone who needs to send one source of digital high definition video to eight HDMI displays at the same time. It supports all HDMI-enabled equipment, such as DVD players, satellite set-top boxes and all HDMI displays. The VS0108H HDMI Splitter is HDCP (High Bandwidth Digital Content Protection) compliant, making it effective for use with all HDMI displays in home theater applications, as well as in corporate, educational and commercial settings.




Opties

- Connects one HDMI video source to 8 HDMI displays at the same time
- Cascadable to three levels
- Supports Dolby True HD and DTS HD Master Audio
- Up to 60 Hz refresh rate
- Long distance transmission - 20 m (24 AWG)
- Superior video quality - HDTV resolution of 480p, 720p, 1080i and 1080p (1920x1080); VGA, SVGA, SXGA, UXGA and WUXGA (1920x1200)
- HDMI (Deep Color)
- DDC Compatible
- HDCP 1.1 compatible
- Consumer Electronics Control (CEC) allows interconnected HDMI devices to communicate and respond to one remote control
- Signaling rates up to 2.25 Gbits in support of 1080p display
- Rack Mountable

Specificaties

Video Uitgang	
Maximale Afstand	15 M op 1920 x 1080 op 60 (4:4:4)
Video Invoer	
Maximale Afstand	3 M op 1920 x 1080 op 60 (4:4:4)
Beeldscherm Verbindingen	
Direct	8
Maximale	512 (via cascade)
Connectoren	
Apparaat	1 x HDMI Type A-tegenstekker (zwart)
Beeldscherm	8 x HDMI Type A-tegenstekker (zwart)
Stroompoort	1 x gelijkstroomjack
LED's	
Stroom	1 (oranje)
Invoer	1 (groen)
Uitgang 1-8	8 (groen)
Video	HDTV tot 1080p; Computer tot WUXGA (1920 x 1200)
Stroomverbruik	5,3 V gelijkspanning, 9,5 W Let op: ● De meting in Watt geeft het typische stroomverbruik van het apparaat zonder externe belasting aan. ● De meting in BTU/h geeft het stroomverbruik van het apparaat aan wanneer het volledig wordt belast.
Omgeving	
Operatietemperatuur	0 - 50 °C
Opslagtemperatuur	-20 - 60 °C
Vochtigheid	0 - 80% RLV, niet-condenserend
Fysieke Eigenschappen	
Behuizing	Metaal
Gewicht	1,74 kg
Afmetingen (L x B x H)	43,20 x 15,40 x 4,40 cm
Let op	Houd er bij sommige producten voor rekmontage rekening mee dat de standaard fysieke afmetingen van BxDxH worden uitgedrukt in een LxBxH-formaat.

Diagram

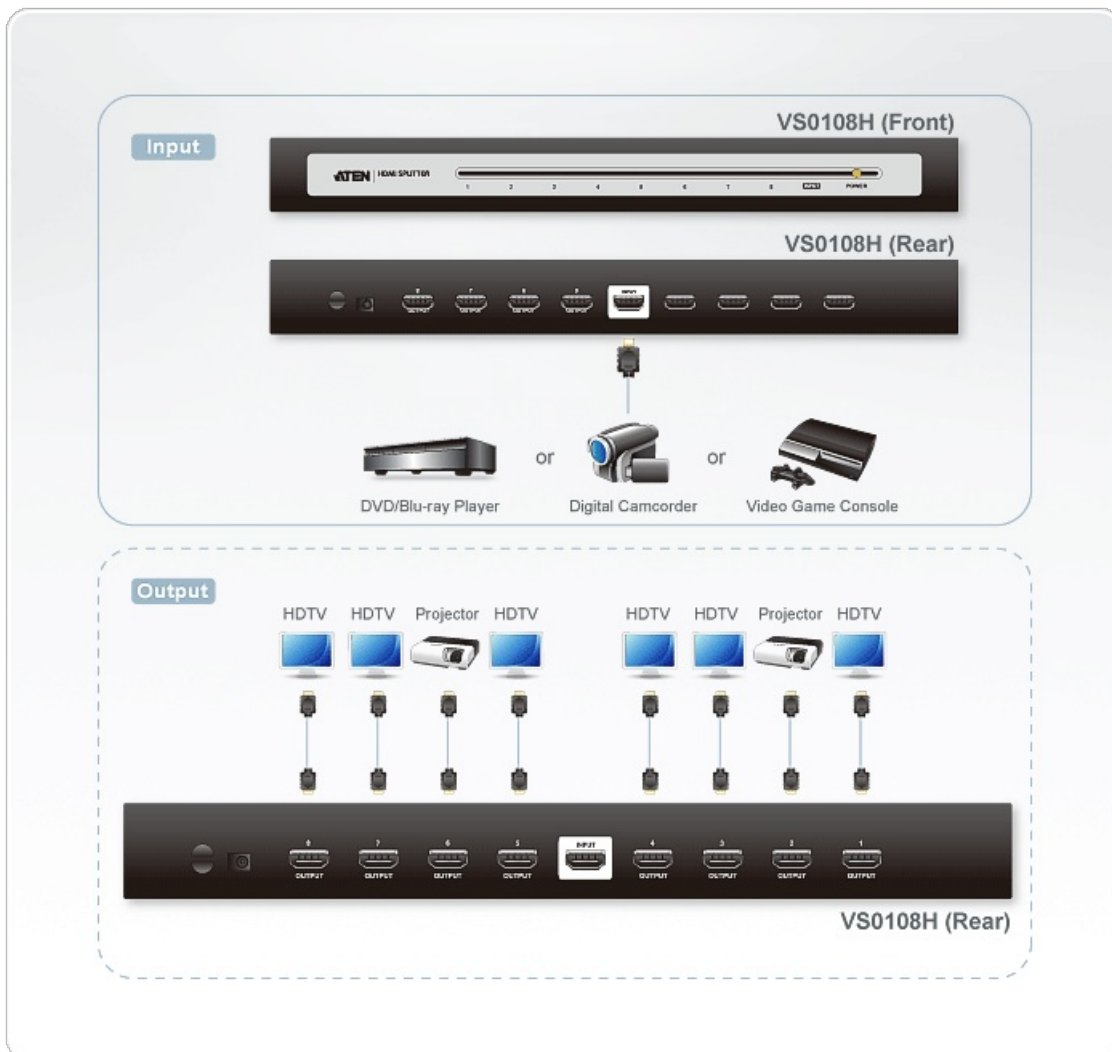

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.