


## UC3002A

USB-C to VGA Adapter



The UC3002A is a USB-C to VGA adapter that allows you to transfer the video of your USB-C equipped laptop, tablet, computer or smartphone to a VGA display or projector. The UC3002A supports high video resolutions up to 1920 x 1200 @ 60 Hz so that you can conveniently scale your display output to a bigger monitor or do presentations from a projector.

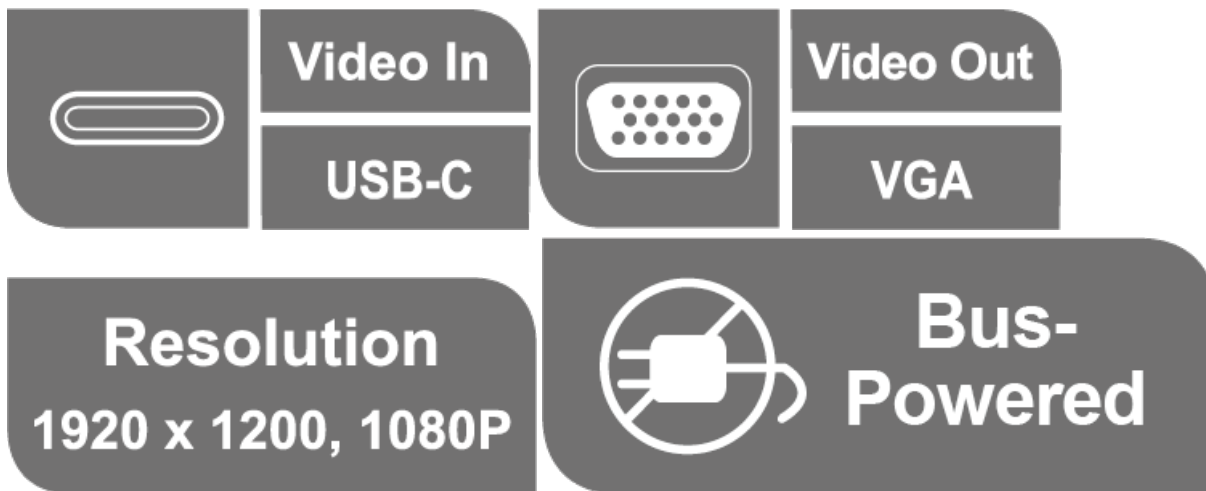


### Features

- Transfer high-quality videos from a USB-C enabled laptop or smartphone to a 1920 x 1200@60Hz VGA display, or projector\*
- Premium casing can resist signal interference during video transmission and heat insulation
- Compact and lightweight design
- Works with all major operating systems: Windows®, OS X®, iPad Pro 3rd gen and Android
- Plug-and-Play – no software required
- Compatible with Thunderbolt 3 (USB-C)

\*With Intel 7th- Generation Core Processor (Kaby Lake) and above. For video output to work through a USB-C port, it must support DP Alt Mode.

## Specifications

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Input            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Interfaces             | 1 x USB-C Male (Black)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Video Output           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Interfaces             | 1 x HDB-15 Female (Black)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Video                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Max. Pixel Clock       | 148.5 MHZ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Max. Resolution        | 1920 x 1200@60Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Compliance             | USB3.1 Type-C with DP Alt Mode (Thunderbolt™ 3 Compatible)<br>USB Billboard Device Class                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| System Requirements    | <p>Windows 10 and above, USB-C enabled computer with DP Alt Mode*</p> <p>* With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: <a href="https://www.intel.com/content/www/us/en/processors/processor-numbers.html">https://www.intel.com/content/www/us/en/processors/processor-numbers.html</a></p> <p>Mac OS X 10.12 and above, USB-C enabled computer</p> <p>Android 8.0 and later, USB-C enabled Smartphone with DP Alt Mode</p> <p>iOS 12.1 and above, iPad Pro 3rd generation (2018)</p> |
| Environmental          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Operating Temperature  | 0 - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Storage Temperature    | -20 - 60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Humidity               | 0 - 80% RH, Non-Condensing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Physical Properties    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Housing                | Aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Weight                 | 0.02 kg ( 0.06 lb )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Dimensions (L x W x H) | 3.95 x 1.40 x 9.60 cm<br>(1.56 x 0.55 x 3.78 in.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                                                                                                                                                                                                                                                                                                                         |

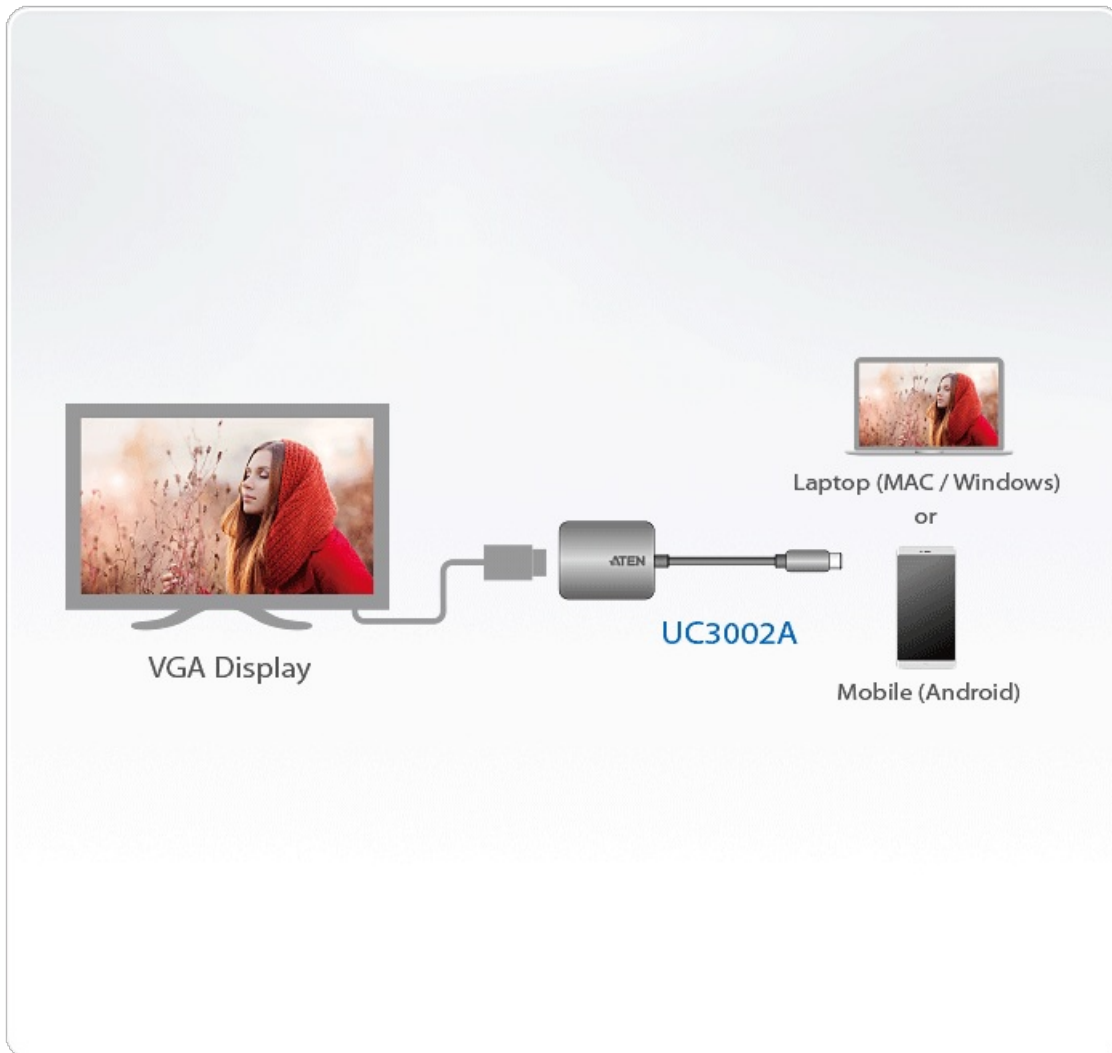**Diagram****ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.