

UE3315A


15 m USB 3.2 Gen 1 Extender Cable



The ATEN UE3315A USB3.2 Gen1 Extender Cable allows users to extend the distance between the computer and USB devices up to 15 m. The UE3315A provides a reliable, high performance data transmission that utilizes USB 3.2 Gen1 data bandwidth up to 5Gb/s and also backward compatible with USB 2.0/1.1 standard. It's plug and play and no additional software installation required, easy to deploy and operate on the fields.

The UE3315A provides a quick and high quality cost effective solution for all kinds of professional environments like: hospitals, factories, or business facilities.

Note: Please visit [ATEN Support Center](#) to view the test report for the compatible webcams for more information.

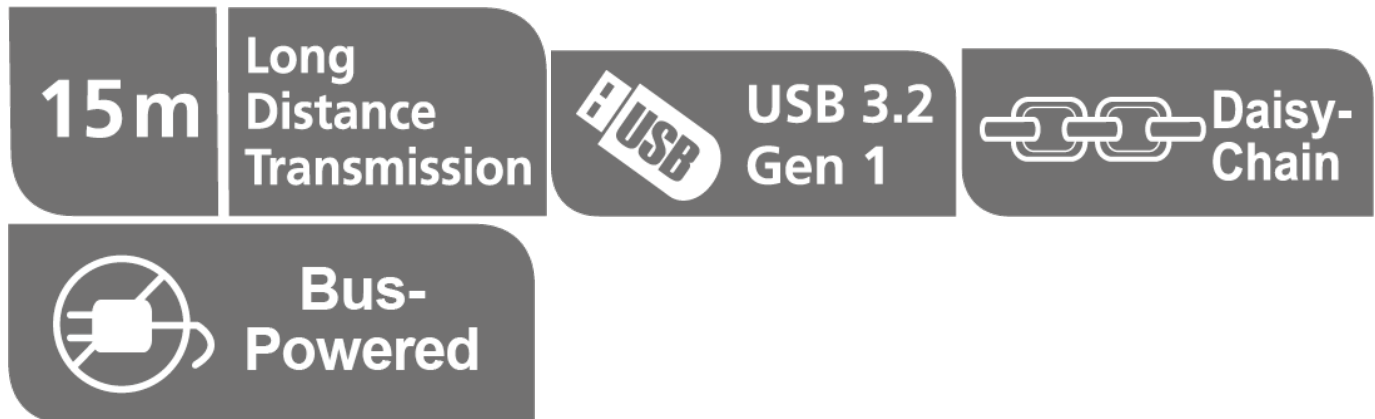

Features


- Supports USB 3.2 Gen1 Specification (5 Gbps)
- Ultra slim design and unique locker head design
- Daisy-chainable, maximum distance of up to 30 m
- Multiplatform support – Windows and Mac
- Additional power adapter included

Specifications

Connectors	
USB Port	1 x USB3.2 Gen1 Type A Male
Downstream	1 x USB3.2 Gen1 Type A Female
USB Specification	USB3.2 Gen1 / 2.0 / 1.1 for Super / High / Full or Low speed
Cable Length	15 m
Data Rate	Up to 5 Gbps
Environmental	
Operating Temperature	0–40°C
Storage Temperature	-20–60°C
Humidity	0-80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	1.19 kg (2.62 lb)
Dimensions (L x W x H)	8.19 x 2.22 x 1.75 cm (3.22 x 0.87 x 0.69 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

► Diagram

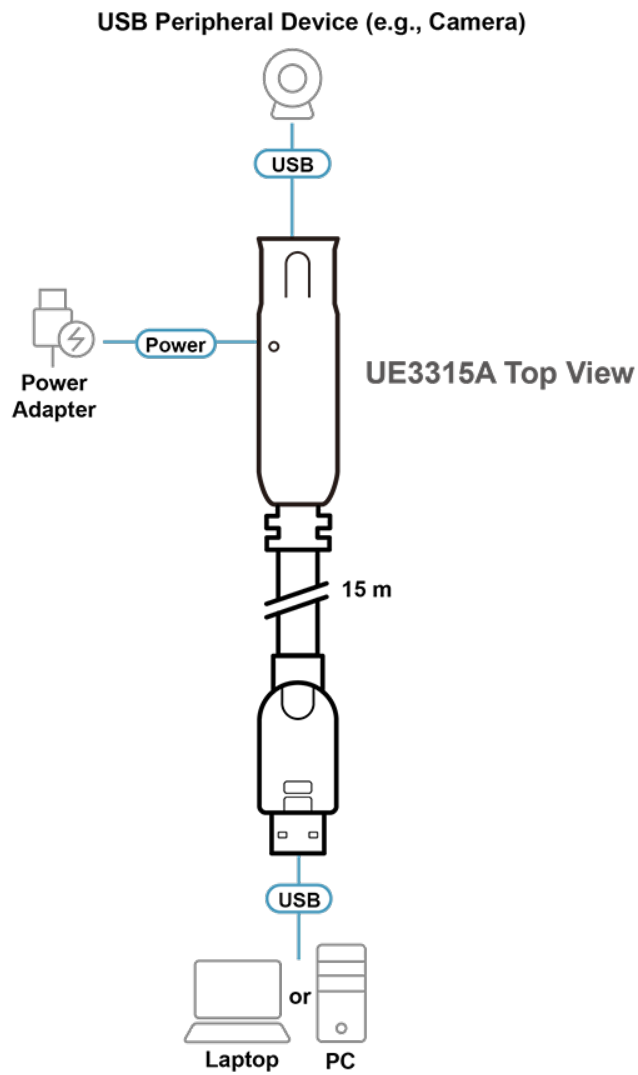

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.