

## 2L-7DA6H

0.6 m High Speed HDMI™ Cable with Ethernet (True 4K)



ATEN High Speed HDMI Cable with Ethernet provides an uncompressed, all-digital interface for both audio and video signals, guaranteeing reliable digital signal transmission up to True 4K (4096 x 2160 / 3840 x 2160 @ 60 Hz 4:4:4). Our cables infuse high-quality tinned copper wire to resist interference for better- defined video and image quality.



### Features

- Optimum signal transmission up to True 4K (4096 x 2160 / 3840 x 2160 @ 60 Hz 4:4:4)
- HDMI Ethernet Channel functionality: additional dedicated data channel supports networking\*
- HDMI (3D, Deep Color, 4K); HDCP 2.2 compliant
- Gold-plated connectors for reliable transmissions
- Available in 0.6 m
- Bend Radius 90° \*\*

Note:


\* Feature only available if linked devices are HDMI Ethernet Channel enabled

\*\* Swings 100 times between angles of +/- 90 degrees, at a frequency of 13 times per minute

## Specification

|                       |                           |
|-----------------------|---------------------------|
| Max. Video Resolution | 4096x2160@60Hz (4:4:4)    |
| Physical Properties   |                           |
| Cable Length          | 0.6M                      |
| Cable Color           | Black                     |
| Cable Outer Dimension | 6.0 ± 0.15mm              |
| Conductor Gauge       | 30AWG                     |
| Conductor Material    | Tinned Copper             |
| Connector Plating     | Gold                      |
| Connector Type        | HDMI (19pin) Male to Male |
| Cable Shield Type     | Aluminum Foil             |
| Cable Jacket Type     | PVC                       |
| Environmental         |                           |
| Operating Temperature | 80°C                      |
| Rating                | UL VW-1 (Flame rate), CSA |

## Diagram

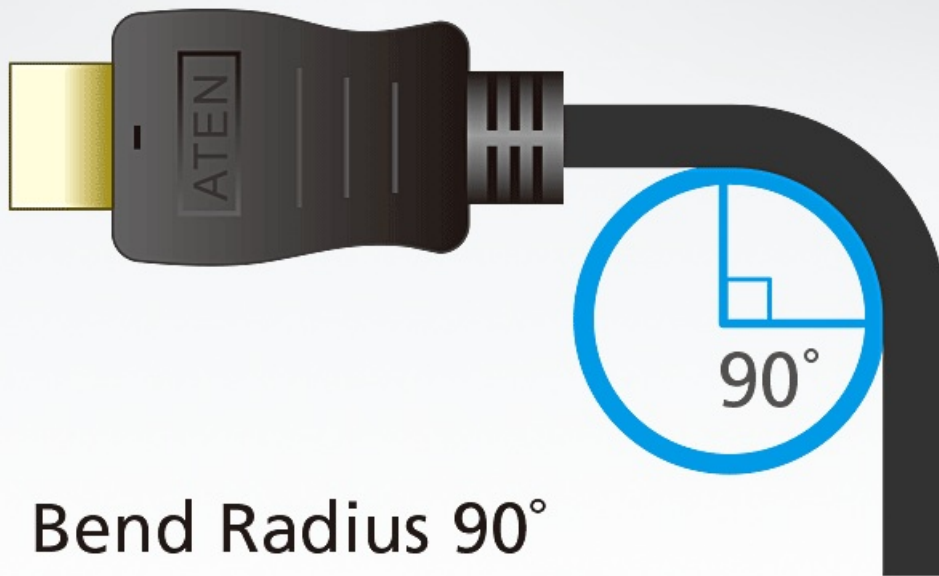

Bend Radius 90°

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.